

VAN-S-H HÜCRELİ AKSİYAL DUMAN EGZOZ FANLARI

VAN-S-H AXIAL SMOKE EXHAUST FANS WITH CASING



F400
400°C 2 Saat · Hour



VENCO VAN-S-H Serisi Hücreli Aksiyal Duman Egzoz Fanları otopark projelerinde kullanılabilecek yüksek sıcaklığa dayanıklı fanlardır. Geniş kapasite aralığı, farklı fan kanadı ve göbeği ve ayarlanabilir kanat açıları ile ihtiyaca uygun ürünler sağlanabilmektedir. Gövde çift cidarlı olup, 50mm taş yünü ile akustik ve ısı yalıtımı sağlanmaktadır.

VENCO VAN-S-H Series Axial Smoke Exhaust Fans with Casing Units are fire resistant fans used in car parks ventilation projects. The best matching fan is supplied in the wide range by selecting several hub and blade combinations and the adjustable blade angle for the optimum capacity. All equipment is easily accessible by the service door. Double skinned casing covered by 50mm rock wool provides acoustic and thermal insulation.




Özellikler

- › Ø315mm'den Ø1250mm'ye geniş seçim aralığı
- › Sıcak daldırma galvanizli sac fan gövdesi ve galvaniz sac ana gövde
- › Alüminyum alaşımlı, açısı ayarlanabilir kanatlar
- › Aerodinamik profilli kanatlar ile yüksek verim ve düşük ses seviyesi
- › Alüminyum alaşımlı fan göbeği
- › Farklı fan kanadı ve fan göbeği kombinasyonları ve açısı ayarlanabilir fan kanatları ile ihtiyaca en uygun, optimum kapasite
- › 50mm taş yünü yalıtımlı, iç yüzeyi perfore kaplı
- › Gövde dışına montajlanmış IP 67 metal elektrik bağlantı kutusu
- › H sınıfı izolasyonlu, IP 55 elektrik motorları
- › 400 V, 3 faz, 50 Hz motor
- › 400°C, 2 saat çalışma sıcaklığı

Features and Benefits

- › Full size from Ø315mm to Ø1250mm diameter
- › Hot dip galvanized sheet metal fan casing and galvanized sheet outer casing
- › Cast aluminum adjustable blade angle impellers
- › Aerodynamic profiled impellers allow high efficiency and low noise
- › Die cast aluminum alloy fan hubs
- › Optimum capacity obtained by different blade-hub combinations besides adjustable blade angels
- › Perforated internal surface with 50mm rockwool insulation
- › IP 67 terminal box is placed out of the casing
- › Electrical motors with IP 55 and H class insulation
- › 400V, 3 phase, 50 Hz
- › Operating temperature at 400°C for 2 hours

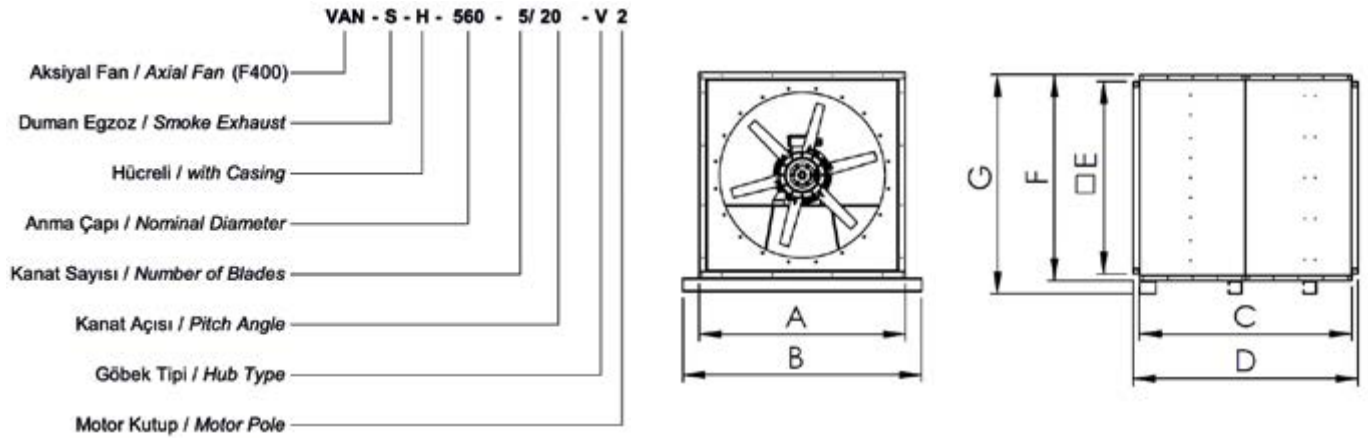

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
VAN-S-H 315	560	660	505	630	530	605	710
VAN-S-H 355	610	710	530	630	530	630	735
VAN-S-H 400	660	760	570	670	555	655	760
VAN-S-H 450	710	810	570	670	605	705	760
VAN-S-H 500	760	910	700	800	655	755	855
VAN-S-H 560/1	810	960	700	800	705	805	905
VAN-S-H 560/2	810	960	950	1050	705	805	855
VAN-S-H 630/1	910	1060	700	800	805	905	1005
VAN-S-H 630/2	910	1060	1100	1200	805	905	985
VAN-S-H 710/1	960	1110	700	800	855	960	1055
VAN-S-H 710/2	960	1110	1100	1200	855	960	1035
VAN-S-H 710/3	960	1110	1400	1500	855	960	1055
VAN-S-H 800/1	1060	1210	700	800	955	1060	1155
VAN-S-H 800/2	1060	1210	1100	1200	955	1060	1155
VAN-S-H 800/3	1060	1210	1400	1500	955	1060	1155
VAN-S-H 900/1	1160	1310	700	800	1055	1160	1255
VAN-S-H 900/2	1160	1310	1100	1200	1055	1160	1235
VAN-S-H 900/3	1160	1310	1400	1500	1055	1160	1255
VAN-S-H 1000/1	1260	1460	700	800	1155	1260	1360
VAN-S-H 1000/2	1260	1460	1100	1200	1155	1260	1360
VAN-S-H 1000/3	1260	1460	1400	1500	1155	1260	1360
VAN-S-H 1120/1	1410	1610	950	1050	1305	1410	1485
VAN-S-H 1120/2	1410	1610	1400	1500	1305	1410	1505
VAN-S-H 1250/1	1560	1810	1100	1200	1455	1560	1635
VAN-S-H 1250/2	1560	1810	1600	1700	1455	1560	1655